

Compact Data Logger

T / RH / Dew Point Monitoring

Delta OHM

Member of GHM GROUP

HD208 series

KEEP TRACK OF YOUR MEASUREMENTS

Monitor & record of temperature & humidity
all along the process

WIDE RANGE OF MODELS FOR ANY APPLICATION

1 or 2 channel

Only temperature or combined with RH
Internal or external sensors

LOGGING FUNCTION EXTREMELY VERSATILE

Manual, automatic or delayed
start and stop of the logging

MEASURED DATA DIRECTLY AVAILABLE

PDF report with charts and CSV file
automatically generated

FACTORY CALIBRATED AND READY TO USE

Pre-calibrated sensors
No further calibration required



Main Applications

Production facilities
Storage rooms
Food process
Cooling chains

The ultimate easy to use logger series for a wide range of applications!

The **HD208** is a easy to use logger series for a wide range of applications: perfectly fit for any local measurement where it is important to record and to keep the data. Used in a diversity of segment in the industry: transport, food (HACCP), pharmaceutical warehousing, storage rooms.

Small, compact design: internal sensors for temperature or humidity and temperature combined. One or two external sensor types.

Additional the loggers can provide Dew Point calculation and even **MKT (Mean Kinetic Temperature)** specifically for food related applications. Free downloadable software for configuration and even real time monitoring and storage of measurement data in a local MySQL database. But reports can also be generated directly as PDF without further need of local software.

For FDA related measurements we provide the option to add software in accordance with **21CFR part 11** recommendations.



Technical Specification

RELATIVE HUMIDITY


Sensor	Capacitive
Measuring range	0...100%RH
Resolution	0.1%RH
Accuracy	$\pm 1.5\%RH$ (0...85%RH) / $\pm 2.5\%RH$ (85...100%RH) @ T=15...35 °C $\pm (2 + 1.5\% \text{ measure})\%$ @ T=remaining range
Sensor operating temperature	-40...+80 °C
Response time	$T_{90} < 20$ s (air speed 2 m/s, without filter)
Temperature drift	$\pm 2\%$ over the whole operating temperature range
Stability	1% / year

TEMPERATURE

Sensor	NTC10k Ω @ 25 °C
Measuring range	-40...+105 °C*
Resolution	0.1 °C
Accuracy	± 0.3 °C in the range 0...+70 °C ± 0.4 °C outside
Long-term stability	0.1 °C / year

* In the case of internal sensor or external fixed probe, the measuring range is limited by the maximum operating temperature of the instrument.

Dimensions

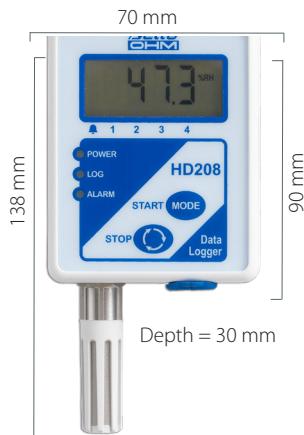

External probes with cable



TP35N1... Temperature probe with NTC10K Ω sensor.


HP3517... Temperature and relative humidity combined probe.



GENERAL SPECIFICATIONS

Logging interval	1, 2, 5, 10, 15, 30 s / 1, 2, 5, 10, 15, 30, 60 min
Storable quantities	According to the model: Temperature - Mean Kinetic Temperature (MKT) - Relative Humidity - Dew Point - Battery Voltage.
Memory	Flash memory with circular management or stop logging when full.
Alarms	Two alarm thresholds (configurable) for each measured quantity
Power supply	3.6 V not rechargeable lithium-thionyl chloride internal battery (Li-SOCI ₂), size AA, 2-pole Molex 5264 connector.
Battery life	2 years typical, with logging interval 30 s
PC connection	USB port with mini-USB connector
Operating conditions	-40...+75 °C / 0...100 %RH non condensing
Material	ABS (with added UV filters)
Protection Degree	IP 64
Weight	150 g approx.
Installation	Wall mount

Ordering Codes

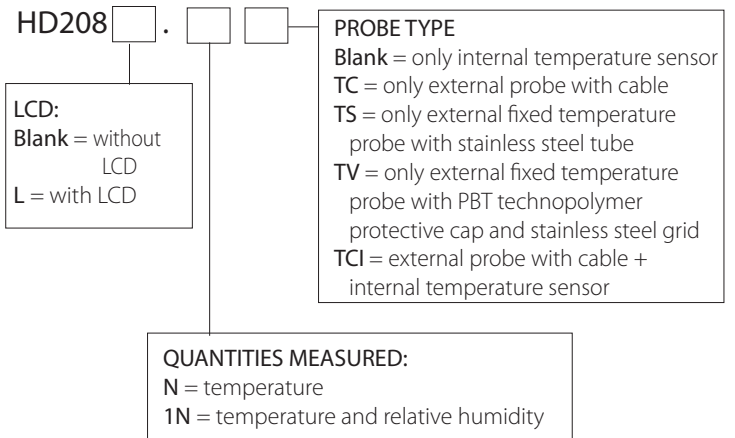

Accessories

HP3517...	Temperature and relative humidity combined probe. M12 4-pole connector. PBT technopolymer body. Available stem lengths: 135 mm or 335 mm. Available cable lengths: 2, 5 or 10 m.
TP35N1.xx/C	Temperature probe with NTC10K Ω sensor. AISI 316 stainless steel tube. 4-pole M12 connector. Cable length 3, 5 or 10 m.
HD35AP-CFR21	Advanced software option for FDA 21 CFR part 11 recommendations
CP23	USB connection cable
HD208.13	Aluminium flange for fixing the instrument to the wall.

Delta OHM

Member of GHM GROUP

In order to ensure the quality of our instruments, we are constantly re-evaluating our products. Improvements can imply changes in specification; we advise you to always check our website for the newest version of our documentation.

We look forward to your enquiry:

Phone +39 049 897 7150

Email: sales@deltaohm.com

Delta OHM S.r.l.

Single Member Company subject to direction and coordination of

GHM MESSTECHNIK GmbH

Via Marconi 5 | 35030 Caselle di Selvazzano (PD) | ITALY